

Utile Series




Ultra-thin Front Maintenance 16:9 LED

Display ULWⅢ1.2 Pro

Product features:

- Thickness of 45mm, ultra-thin and ultra-light design.
- Front and rear installation ,full front maintenance.
- XYZ six-way adjustment
- High integrated system.

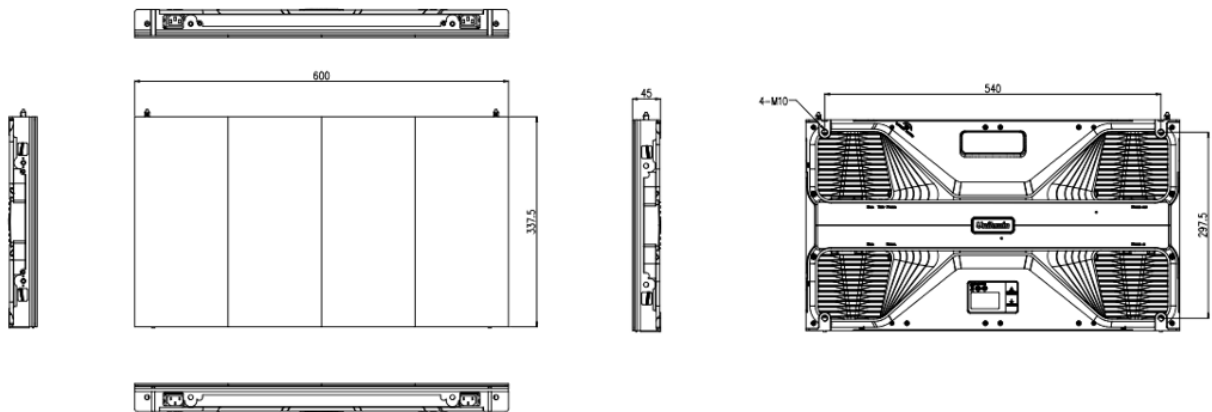

* optional function

SPECIFICATION PARAMETERS:

Specification	ULWIII1.2 Pro
Pixel Pitch	1.2mm
LED Type	3-in-1 SMD
Brightness	800cd/m ²
Pixel Density	640,000pixels/m ²
Pixels Per Panel	480*270pixels
Pixels Per Module	120*270pixels
Module Size	150mm×337.5mm
Panel Size	600mm×337.5mm×45mm
Weight	5kg/panel
Maintenance	Front
Ingress Protection	Rear IP30
Curve	0°~+5° (Concave)
Planeness	≤0.15mm
Recommended Viewing Distance	≥1.2m
Environment	indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,500K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	6000:1
Input Power <Max>	105W/panel
Input Power <Typical>	35W/panel
Input Voltage	100~240VAC
Processing Depth	18bit

Refresh Rate	7680Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~ +40°C/10~80%RH
Storage Temperature/Humidity	-20°C~ +60°C/10~85%RH
Certification	CE/CB/FCC/ROHS/ CCC

Note:

- 1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- 2.The specification parameters are reference values. Part of the data comes from Unilumin' s internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
- 3.Different configurations can achieve different refresh rates.