UHPIII

Stable Keeps Going and Going






FEATURES

- Vivid Viewing Experience with Adjustable Color Temperature & Ultra-high Contrast
- Super-High Stability Enhanced by Latest Flip Chip Technology
- Deep Energy Saving Technology
- Ultra-light and Slim Design
- Ease of Operation with 6+1 Easy Mode

APPLICATIONS

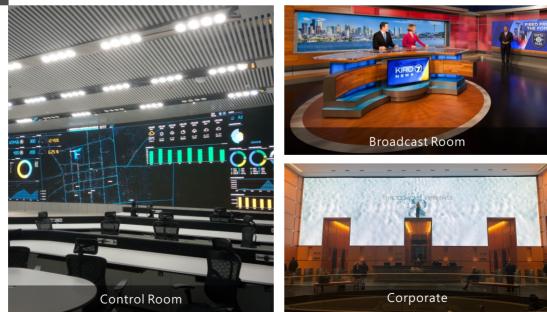




SPECIFICATIONS

Parameter	Value		
Model	UHPIII 0.9	UHPIII 1.2	UHPIII 1.5
Pixel Pitch	0.9 mm	1.2 mm	1.5 mm
Brightness	800cd/ m²	1000cd/ m²	1000cd/ m²
Pixels Per Panel	640x360pixels	480x270pixels	384x216pixels
Panel Size	600mm×337.5mm×39.5mm	600mm×337.5mm×39.5mm	600mm×337.5mm×39.5mm
Weight	6kg/panel	6kg/panel	6kg/panel
Maintenance	Front & Rear	Front & Rear	Front & Rear
Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Color Temperature	2,000K-9,500K Adjustable	2,000K-9,500K Adjustable	2,000K-9,500K Adjustable
Horizontal Viewing Angle	160°	160°	160°
Vertical Viewing Angle	160°	160°	160°
Contrast Ratio	8,000:1	15,000 : 1	15,000 : 1
Input Power <max></max>	115 W/panel	115 W/panel	115 W/panel
Input Power <typical></typical>	35 W/panel	35 W/panel	36 W/panel
Processing Depth	16bit	16bit	16bit
Refresh Rate	1920~3840 Hz	1920~3840 Hz	1920~3840 Hz

DIMENSIONS -

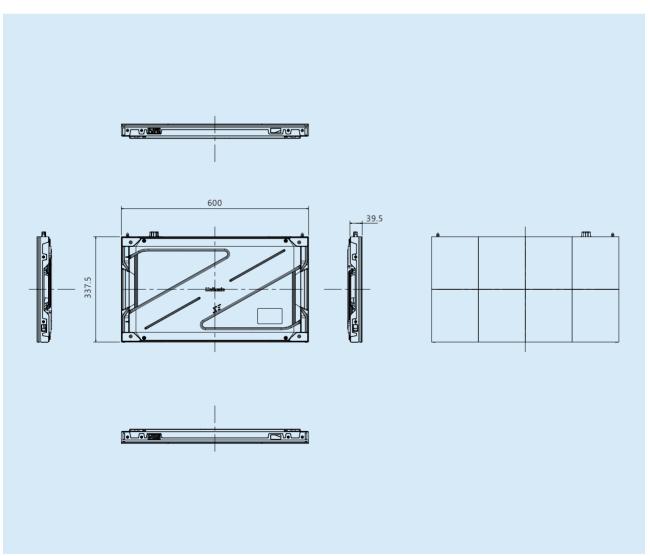

Copyright © 2021 Unilumin Group Co. Ltd. All rights reserved. Unilumin is a registered trademark of Unilumin Group Co. Ltd. Specifications and designs are subject to change without notice. The names of products, brands and services mentioned here may be the trademarks of their respective owners.

